



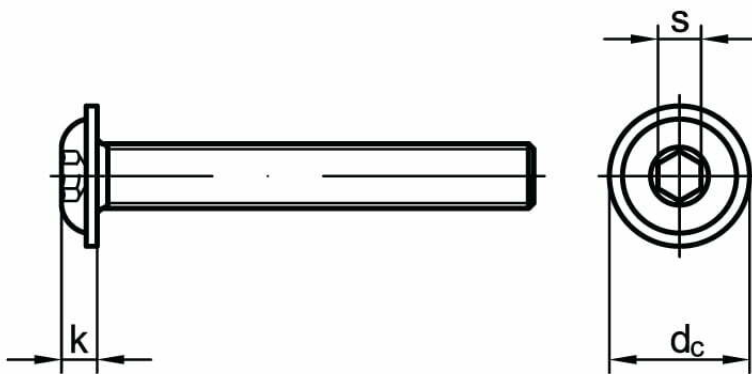

Śruby z łbem wypukłym z gniazdem sześciokarbowym, z gwintem na całej długości trzpienia ~ ISO 7380-1

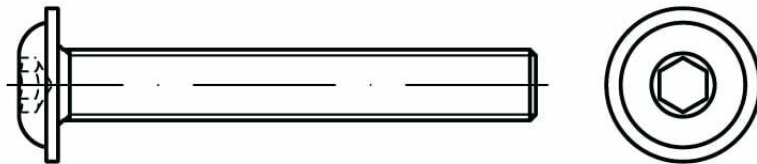

NORMA	MATERIAŁ	KLASA	POWŁOKA
ISO 7380-1	A2	10.9	ocynk bez pokrycia

d	M3	M4	M5	M6	M8	M10	M12	M16	
P – podziałka gwintu	0,5	0,7	0,8	1	1,25	1,5	1,75	2	
d _k	max.	5,7	7,6	9,50	10,50	14,00	17,50	21,00	28,00
	min.	5,4	7,24	9,14	10,07	13,57	17,07	20,48	27,48
k	max.	1,65	2,20	2,75	3,3	4,4	5,5	6,60	8,80
	min.	1,40	1,95	2,50	3,0	4,1	5,2	6,24	8,44
s _{nom}	2	2,5	3	4	5	6	8	10	
Tx – nie ujęte w normie	–	20	25	30	40	50	–	–	