




Nitonakrętki z trzpieniem sześciokątnym z kołnierzem walcowym

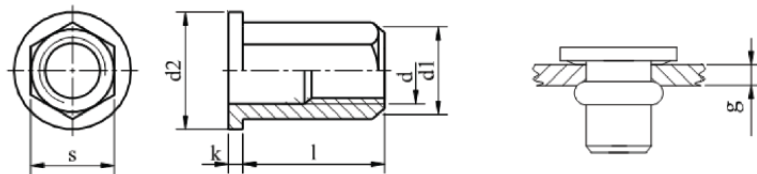

NORMA	MATERIAŁ	KLASA	POWŁOKA
	stal		ocynk galwaniczny

d_{nom}	M4	M5	M6	M8		M10	M12
s_1	6	7	9	11		13	16
d_2	9	10	13	16		19	23
k	1	1	1,5	1,5		2	2
l	11	12	16	18	19,5	24	22
g^*	0,25 – 2,00	0,50 – 3,00	0,50 – 3,00	0,50 – 3,00	3,00 – 5,50	1,00 – 3,50	1,00 – 4,00
*	6,1	7,1	9,1	11,1		13,1	16,1